


## 雙軸控制器接線說明

適用型號Model:

DAC-110V, DAC-24V

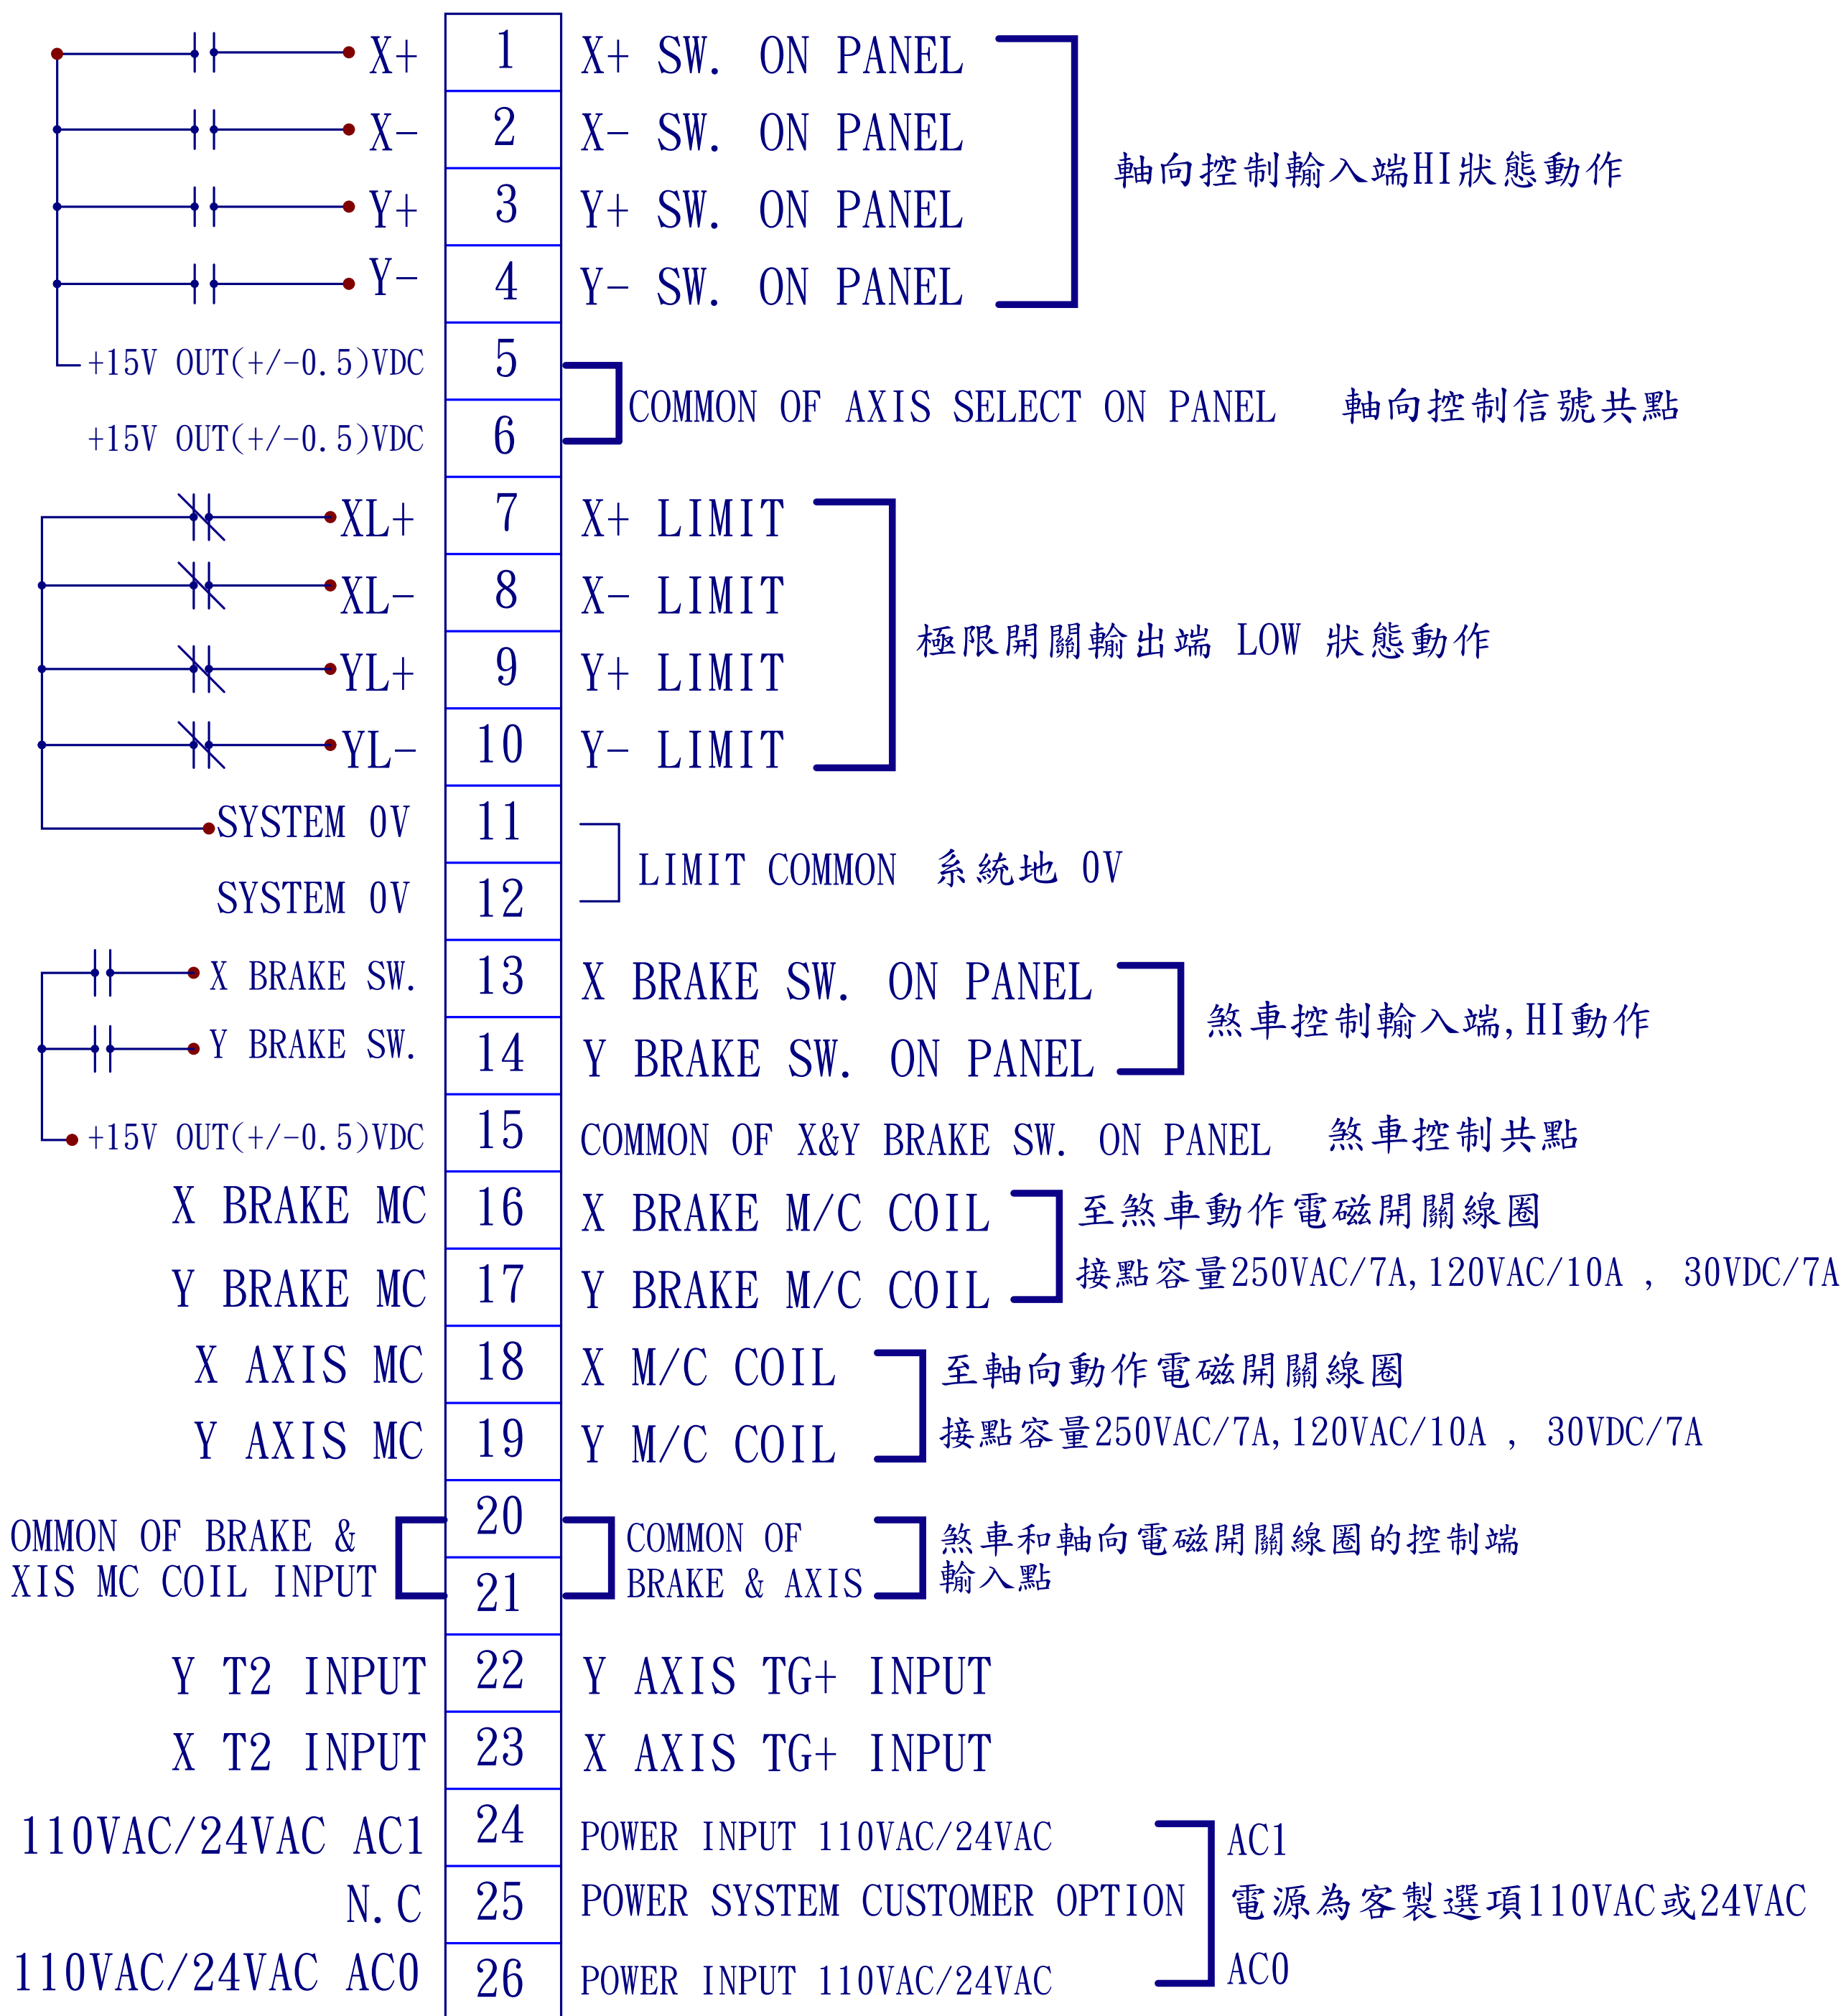

|                |   |                                                       |
|----------------|---|-------------------------------------------------------|
| L+ OUTPUT      | 1 | LIMIT RT. OUTPUT(TO DRIVER PIN 5 OF TB1) 正極限輸出 接至驅動L+ |
| L- OUTPUT      | 2 | LIMIT LT. OUTPUT(TO DRIVER PIN 6 OF TB1) 正極限輸出 接至驅動L- |
| INHIBIT OUTPUT | 3 | INHIBIT OUTPUT(TO DRIVER PIN 20 OF TB1) 禁制輸出 接至驅動ENA  |
| CW OUTPUT      | 4 | CW OUTPUT(TO DRIVER PIN 10 OF TB1) 正轉輸出 接至驅動TU控制CW    |
| CCW OUTPUT     | 5 | CCW OUTPUT (TO DRIVER PIN 11 OF TB1) 反轉輸出 接至驅動TU控制CCW |
| T. G OUTPUT    | 6 | T. G OUTPUT(TO DRIVER PIN 3 OF TB1) X, Y TG訊號切換輸出點    |
| SYSTEM GND     | 7 | SYSTEM GND系統地 0V                                      |
| FG             | 8 | FG                                                    |