


英國 SEM AC 伺服馬達系列

□ HJ130

Parameter	Unit	HJ130A8-64S	HJ130B8-64S	HJ130C8-64S	HJ130E8-64S
MOTOR					
Rated Speed	RPM	3000	3000	3000	3000
Max Mechanical Speed Limit	RPM	4000	4000	4000	4000
Continuous Stall Torque TENV	Nm	2.8	4.2	5.7	8.4
Continuous Stall Current (rms)	Amps	3.7	6.4	7.6	11.2
Maximum Current	Amps	17	30	34	52
Peak Stall Torque	Nm	8.6	14.5	17	26
Resistance	Ohms	3.7	2.1	0.91	0.54
Motor Weight	Kg	6.1	7.1	7.9	9.7

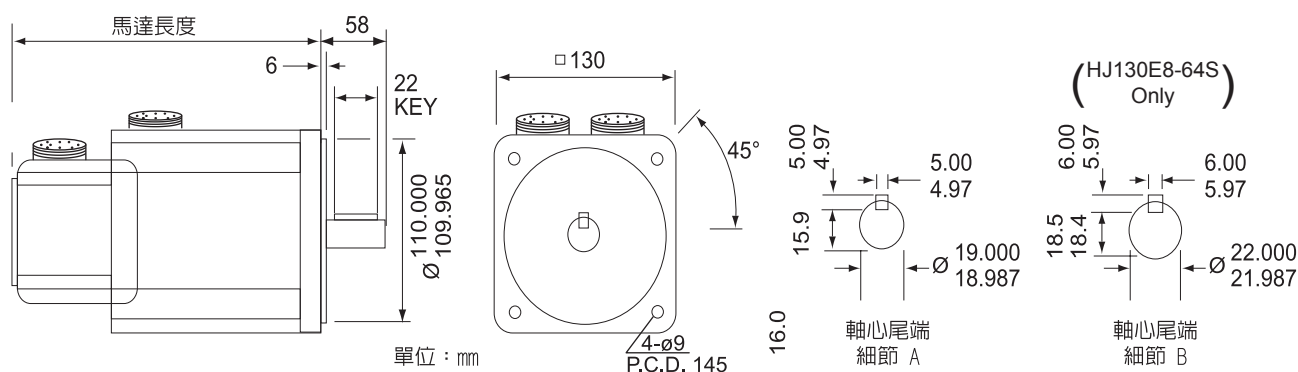

□ HJ155

Parameter	Unit	HJ155A8-64	HJ155B8-88	HJ155E8-130	HJ155G8-135
MOTOR					
Rated Speed	RPM	3000	4500	3000	3000
Max Mechanical Speed Limit	RPM	5000	5000	5000	5000
Continuous Stall Torque TENV	Nm	11.5	16	25	32
Continuous Stall Current (rms)	Amps	15	16	16	20
Maximum Current	Amps	76	80	79	105
Peak Stall Torque	Nm	35	52	74	103
Resistance	Ohms	0.37	0.39	0.52	0.35
Motor Weight	Kg	12.5	15	23	28

